




SKYSOL2 Frame

Order Form and Product Guide

Customer _____ Tel _____
 Address _____ Mobile _____
 _____ Email _____ Project Name _____
 _____ Project Location _____

1	2	3	4	5	6		7	8	9	11	12	13	14	15
					Overall Frame Dimensions See table below									
Blind	Window Location	Blind or Recess	Blind Type ²	Incline 	Width (X)	Drop (Y)	Hardware Colour*	Frame Details	First Fabric	Blind Format	Second Fabric	Manual Handle Options	Powered options ^{5,6}	Qty
1		Blind Recess ¹	AO (0°) Powered only AB (0° - 30°) DB (30° - 60°) PB (60° - 90°)				Beige White Graphite *all components except frame & fabric	Orientation Standard Reversed Colour Beige White		Single ended Full Travel	N/A	Clear (for control rod) Rod Length (mm) _____ Qty _____ Webbing OA Articulating OA Fixed Handle Plastic ⁴ Metal Nickel Metal Chrome	Motor Wire exit point Left Right Centre Control Switch constant Switch Radio Motor Type	
										Single ended Full Travel ³ Both fabrics stack same end	Fabric code _____			
2		Blind Recess ¹	AO (0°) Powered only AB (0° - 30°) DB (30° - 60°) PB (60° - 90°)				Beige White Graphite *all components except frame & fabric	Orientation Standard Reversed Colour Beige White		Single ended Full Travel	N/A	Clear (for control rod) Rod Length (mm) _____ Qty _____ Webbing OA Articulating OA Fixed Handle Plastic ⁴ Metal Nickel Metal Chrome	Motor Wire exit point Left Right Centre Control Switch constant Switch Radio Motor Type	
										Single ended Full Travel ³ Both fabrics stack same end	Fabric code _____			

- When Recessed dimension is given, 4 mm is deducted from the width and drop to allow for clearance in the recess.
- AO Blind type can only be powered when in a frame, all other blind types can be manual or powered.
- This is the Day/Night option, i.e both fabrics stack at the same end.
- Colour matched to the hardware.
- Please fill in a Powered Accessories Order Form.
- For blinds with two fabrics you will need to specify a Day/Night Controller on the Powered Accessories Custom order form. Larger widths can be accommodated depending on fabric and drop, visible support cords can be added and additional fixings on frames 1m wide may be required.

Maximums & minimums With Guide Wires


	Width (X)		Drop (Y)	
	Min	Max	Min	Max
Manual	1400mm	2500mm	200mm	2500mm
Powered	[55 1/8"]	[98 7/16"]	[7 7/8"]	[98 7/16"]

Without Guide Wires


	Width (X)		Max	Drop (Y)	
	Min	Day Night ³		Min	Max
Manual	Single or Double ended 128mm 5 1/16"]	128mm 5 1/16"]	2500mm [98 7/16"]	200mm [7 7/8"]	2500mm [98 7/16"]
Powered	478mm [18 13/16"]	628mm [24 3/4"]			



Standard frame powered AO types only (see note 2) vertical mounting only.

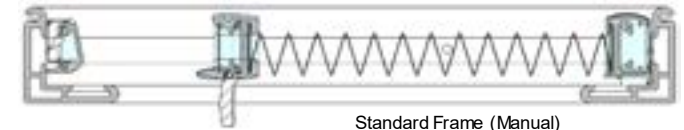

Standard Frame (Manual)

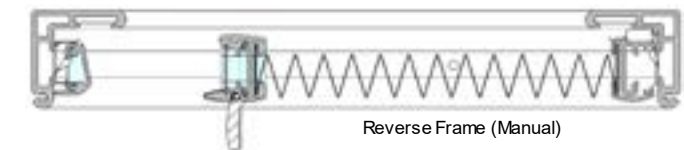

Reverse Frame (Manual)

Notes

